

1 DESCRIPTION


The ASI1433 is an analog output module intended for use in the Hono AVB/Cobranet Custom Interfaces. It contains eight outputs that operate at 48kHz (Cobranet) and 48/96kHz (AVB) sample rates.

Up to four ASI1433 modules may be used in one unit. AudioScience's CobraNet implementation, based on the CobraNet chip used, allows for up to 16 inputs and outputs, out of a possible 32, to be used at any given time. AVB units may use all 32 possible channels.

A unique feature of the ASI433 is its interchangeable I/O connector. A choice of 50pin Centronics (ASI1491), StudioHub+™ (ASI1492) or Terminal Block (ASI1493) allows the module to adapt to a wide variety of interconnection schemes with minimal custom wiring.

2 FEATURES

- Eight outputs
- 24bit digital-to-analog converters: 105dB SNR and 0.0015% THD+N
- -10 to +24dBu software controlled output level
- Interchangeable Module Connectors with choice of Terminal Block, StudioHub+™ RJ-45 or 50pin Centronics connector (compatible with AudioScience sound cards)
- Up to four modules can be used in one Hono Custom

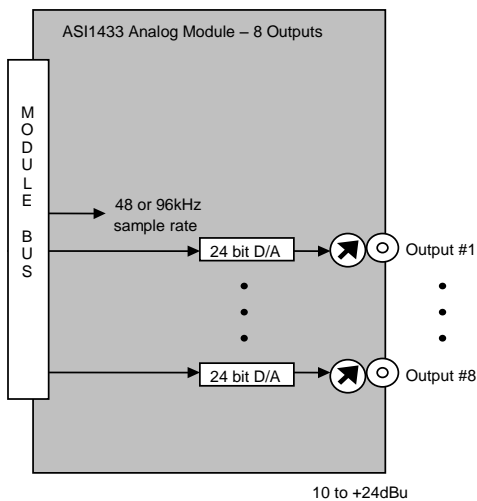

ASI1491
50 pin Centronics



ASI1492
StudioHub



ASI1493
Terminal Block

3 SPECIFICATIONS

ANALOG OUTPUT

Type	Balanced
Input Level	-10 to +24dBu in 1dBu steps
Input Impedance	10K ohms
D/A converter	24bit Over sampling
Load Impedance	600ohms or greater
S/N Ratio[1]	>105dB (record or play)
THD+N[2]	<0.0015% (record or play)
Frequency Response	20Hz to 20kHz +0.1/-0.30dB

SAMPLE RATE CLOCK

Internal - Cobranet	48kHz
Internal - AVB	48kHz or 96kHz

CONNECTOR MODULES

ASI1491	50 pin Centronics
ASI1492	StudioHub compatible RJ-45 jacks
ASI1493	5 position 3.81mm pluggable terminal block (8 per module)

GENERAL

Bus	AudioScience Hono Custom series module bus
Dimensions	(Without Module Connector) 5.5" x 3.25" x 0.6" (140mm x 83mm x 15mm)
Weight	8 oz (227g) max
Operating Temperature	0C to 70C
Power Requirements	+5V @ 500mA

NOTES

[1]	Dynamic Range measured with Input Level set to +26dBu, using a -60dB 1kHz sine wave and A weighting
[2]	THD+N measured with Input Level set to +21dBu, using a +20dBu 1kHz sine wave sampled at 48kHz, 20-20kHz b/w and A weighting filter

4 REVISIONS


Date	Description
27 June 2009	Elaborated first page, second paragraph. Updated format, including adding a REVISIONS section.
03 December 2009	Section 3 - Adjust frequency response to +0.1/-0.3dB
06 April 2010	Section 5.3: Added Rev numbers
13 October 2017	Updated to include AVB compatibility

5 CONTENTS

1	DESCRIPTION	1
2	FEATURES	1
3	SPECIFICATIONS	2
4	REVISIONS	3
5	CONTENTS.....	4
7	MODULE CONNECTORS	5
7.1	ASI1491 50PIN CENTRONICS	5
7.1.1	<i>CBL1046 – 8 Analog XLR In Cable</i>	5
7.2	ASI1492 STUDIOHUB+ (RJ45)	6
7.3	ASI1493 TERMINAL BLOCK.....	6

7 MODULE CONNECTORS

7.1 ASI1491 50pin Centronics

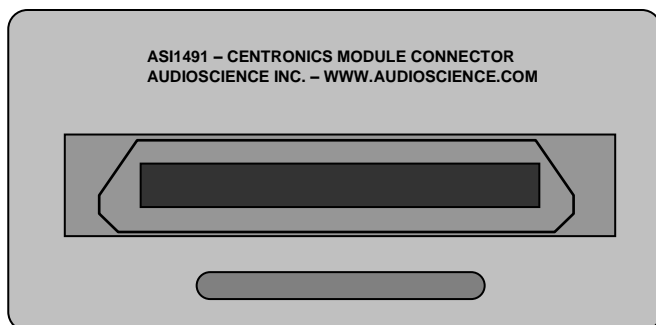

The ASI1491 Module Connector provides a 50pin Centronics connector (also referred to as a 50pin SCSI connector). AudioScience's CBL1046 XLR breakout cable can be used with this connector.

The table to the right shows the pinouts when used with the ASI1433 Analog Module.


50pin Centronics Connections			
Signal	Pin #	Pin #	Signal
	1	26	
	2	27	
	3	28	
	4	29	
	5	30	
	6	31	
	7	32	
	8	33	
Output 8 -	9	34	Output 8 +
Output 7 -	10	35	Output 7 +
Output 6 -	11	36	Output 6 +
Output 5 -	12	37	Output 5 +
Output 4 -	13	38	Output 4 +
Output 3 -	14	39	Output 3 +
Output 2 -	15	40	Output 2 +
Output 1 -	16	41	Output 1 +
	17	42	
	18	43	
	19	44	
	20	45	
	21	46	
	22	47	
	23	48	
	24	49	
GND	25	50	GND

7.1.1 CBL1046 – 8 Analog XLR In Cable



CBL1046, purchased separately, can be used with the ASI1491 50pin Centronics connector and the ASI1433 analog module. It is a 50pin to 8 out XLR, balanced analog cable.

7.2 ASI1492 StudioHub+ (RJ45)

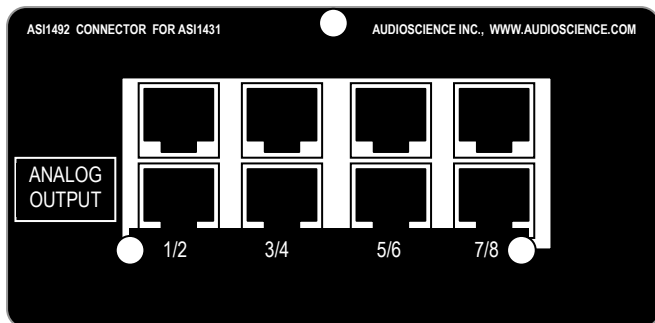

StudioHub (RJ45) Connections		
Pin	Function	Color Code
Shield	Shield	
1	Channel 1/3/5/7 +	White/Orange
2	Channel 1/3/5/7-	Orange/White
3	Channel 2/4/6/8 +	White/Green
4	Ground	Blue/White
5		
6	Channel 2/4/6/8 -	Green/White
7		
8		


The ASI1492 StudioHub Module Connector provides pairs of outputs on an RJ-45 type jack compatible with the Radio Systems StudioHub standard. This allows the balanced analog signal to be transmitted using shielded twisted pair (STP) cable.

The RJ45 connections are shown in the table to the right. Only the bottom output jacks are used.

For more information on the StudioHub standard, see www.studiohub.com.

7.3 ASI1493 Terminal Block

Rev A-E

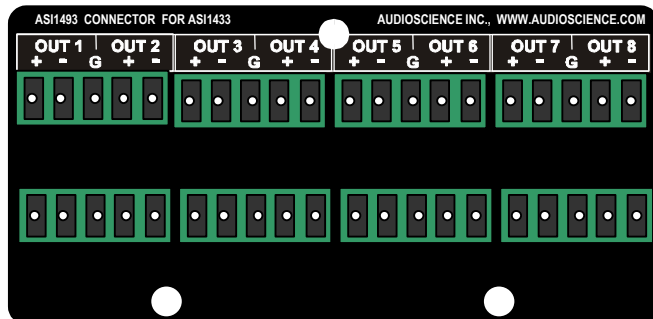

The ASI1493 Terminal Block Connector provides 3.81mm pluggable terminal blocks.

When used with the ASI1433 module, only the top output terminals are used, as labeled in the diagram to the left.

<end>