



JUL-9-2007

CBL1101



Centronics-50 to mini-scsi-26 Cable

History

07/01	A	created
08/30	B	correct labelling and orientation of cable picture, make WORD I/O twisted pair
03/04/04	C	added 50pin centronics pinout
2007-06-09	D	added outputs 7,8 (shared with inputs 3,4)
2007-06-10	E	only use 13 pairs, correct position of ferrite
2007-06-10	F	overall length is 3 feet

This cable is used as an adapter between the mini-scsi-26 and the Centronics-50 on the ASI5000/6000 series.

	P1	P2
Type	C50-F	HPDB26M
Label		
Pins...	1,26	11,24
	2,27	1,14
	3,28	2,15
	4,29 and 14,39	3,16
	5,30 and 15,40	4,17
	6,31 and 11,36 and 25,50	13,26
	7,32	5,18
	8,33	6,19
	9,34	7,20
	10,35	8,21
	12,37	9,22
	13,38	10,23
	24,49	12,25

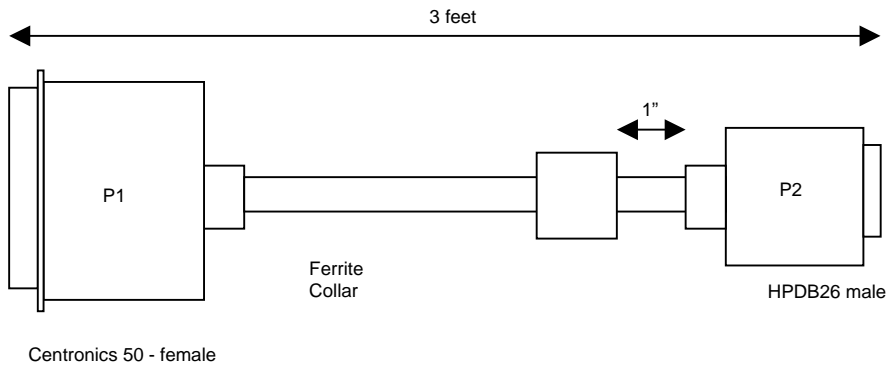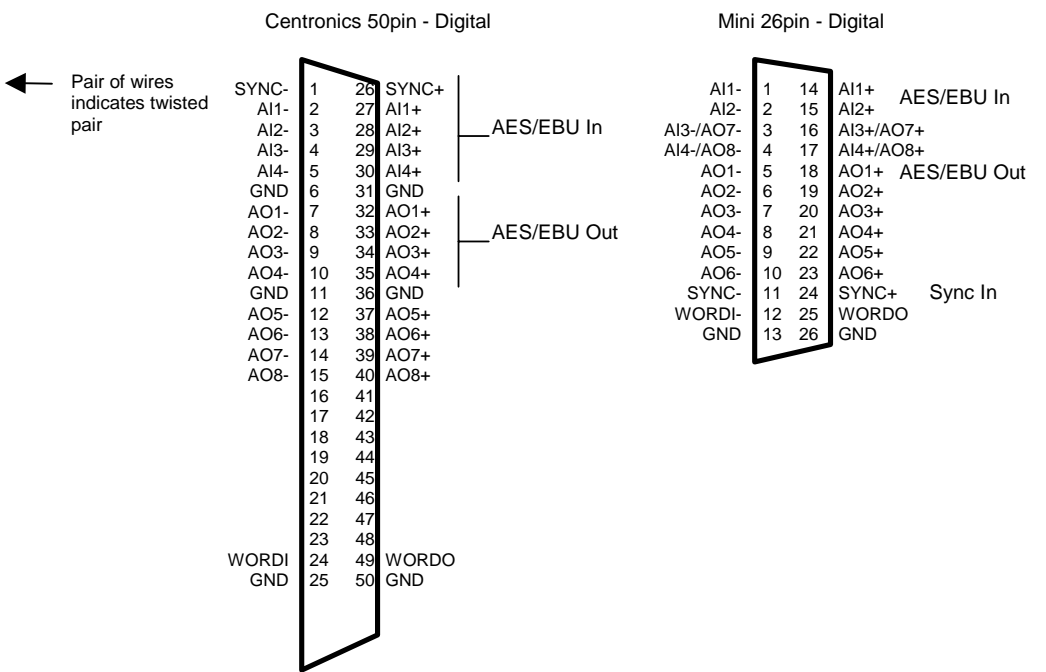

[end]